


General		
Shape	Round	
Seating Capacity	7+	
Shell Material	Ultralife™ / Granitex™	
Dimensions	87" Diameter x 36" H / (221cm Diameter x 91cm H)	
Corner Radii	n/a	
Water Capacity	340 Gallons (1287 Liters)	
Dry Weight	560 lbs (254 kg)	
Shipping Weight	Domestic 560 lbs (254 kg) - Export 610 lbs (277 kg)	
Full Weight	3395 lbs (1540 kg)	
Skirt Material	Wood	
Poly Floor	Yes	
Water System		
Water Treatment System	Crystal Zone™	
Plumbing Systems	2	
Filters/Coverage	1 / 75 sq. ft.	
Gate Valves	2	
VCR Jet® - Air Adjustable/Directional	2	
VCR Jet® - Rotator	6	
VCR Jet® - Dual Rotator	0	
VCR Jet® - Multi Port Spinner	0	
VCR Jet® - Mini Rotator	2	
VCR Jet® - Mini Directional	2	
VCR Jet® - Euro Directional	0	
VCR Jet® - Euro Rotator	0	
VCR Jet® - Mini Directional in NFJ	0	
Typhoon Jet	2	
Ozone Jet	1	
Heater Return Jet	1	
Pump Returns	2	
Diverter Valves	1	
Floor Drains	1	
Skimmer	8" Weir	
Special Features		
Dynamic Massage Sequencer w/ control panel	No	
NeckFlex® Jet Pillows	0	
Headrest Pillows	0	
Stereo system	not available	
Water Feature	n/a	
Water Feature Volume control	n/a	
Cup Holders	0	
Tactile Therapy	Floor pedastal	
Pump Information		
	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Motor Size – Peak (Continuous) HP	4.0 (2.5) Hp	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	One / Dual	One / single
Circulation pump	1	1
Fountain pump	n/a	n/a
Electrical System		
	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Voltage	240	240
Amperage	40/30	1X16 / 2X16 / 1X32
Heater	FastFlo 2.7,4.0,5.5 kW	FastFlo 2.9 kW
Thermostat	Electronic	Electronic
Light	1 with optional LED	Multi color LED
Control System	MSPA-MP-D12	MSPA-MP-D11-CE
Upper Control (programmable)	Scrolling Message Center	Scrolling Message Center
Auxiliary Upper Control	No	No



Note: 1. Subject to change without notice.


# Arena Architectural Specification

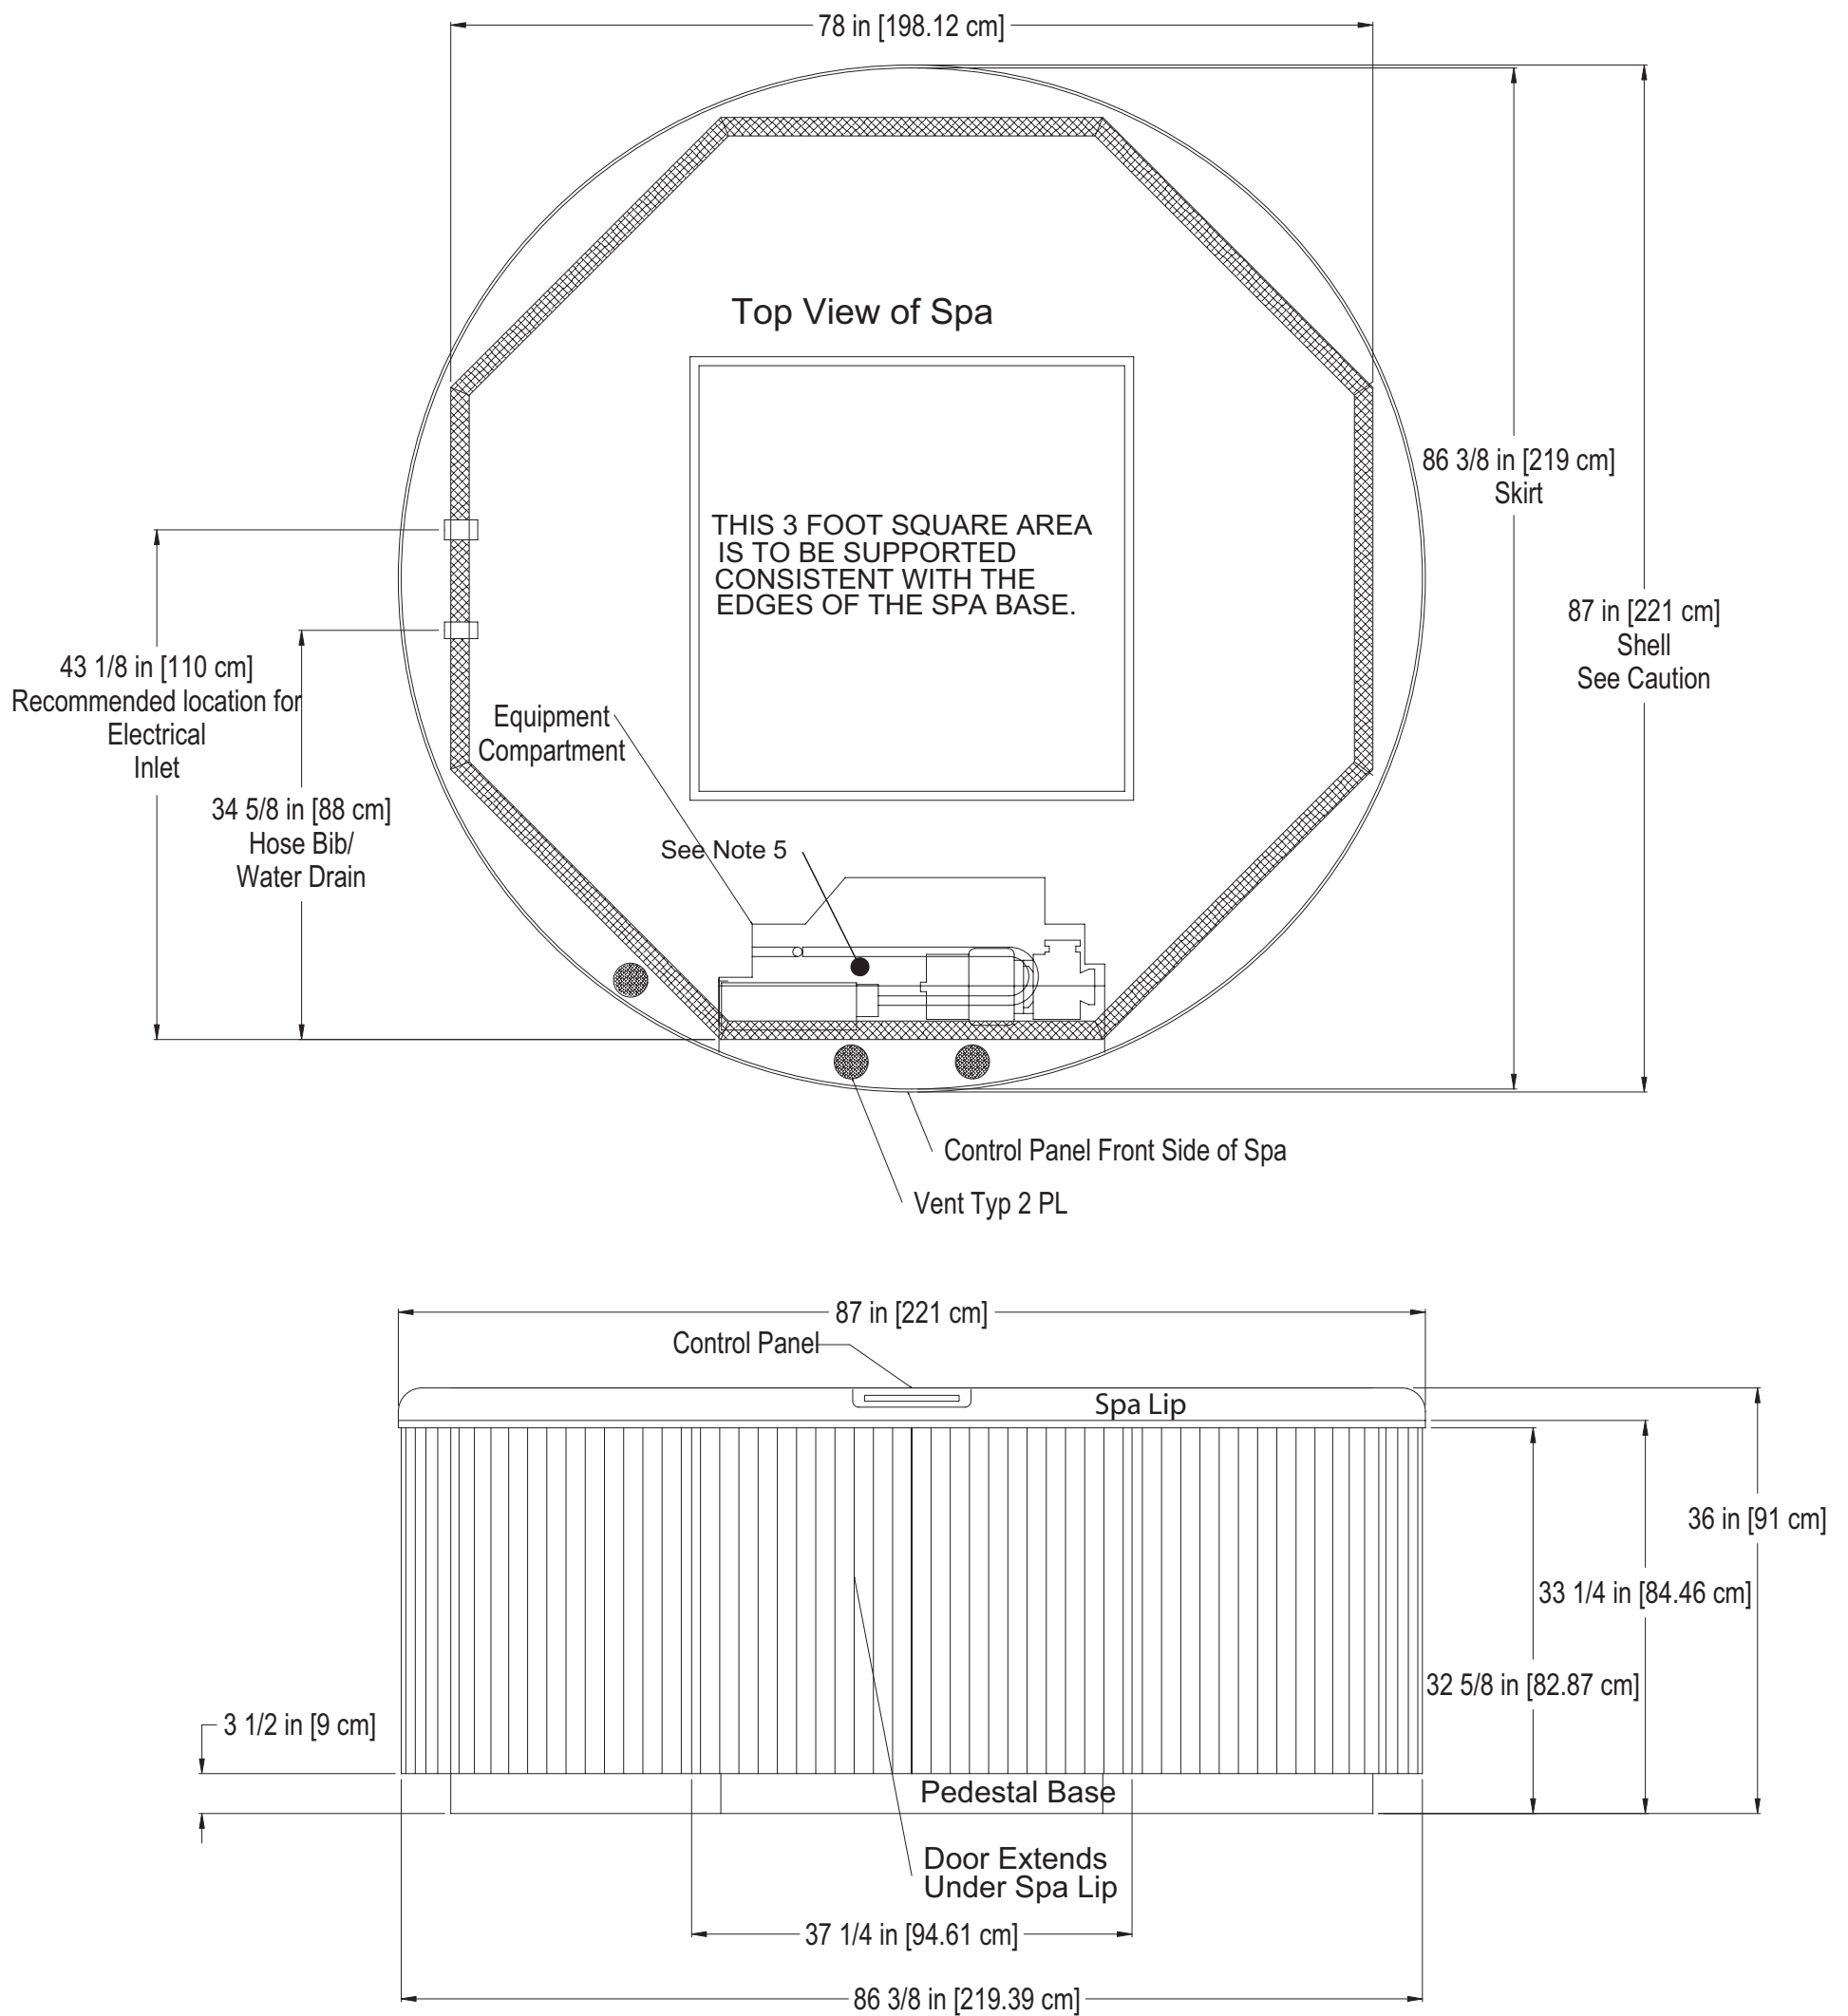

- Note: 1. Subject to change without notice.  
 2. Engineering specs may differ slightly from brochure.  
 3. For E-Z lifter installation allow 18" clearances on the backside of the spa.  
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details  
 5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment(drill from the inside compartment out).

Caution:  
 Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.


# Arena Plumbing Configuration

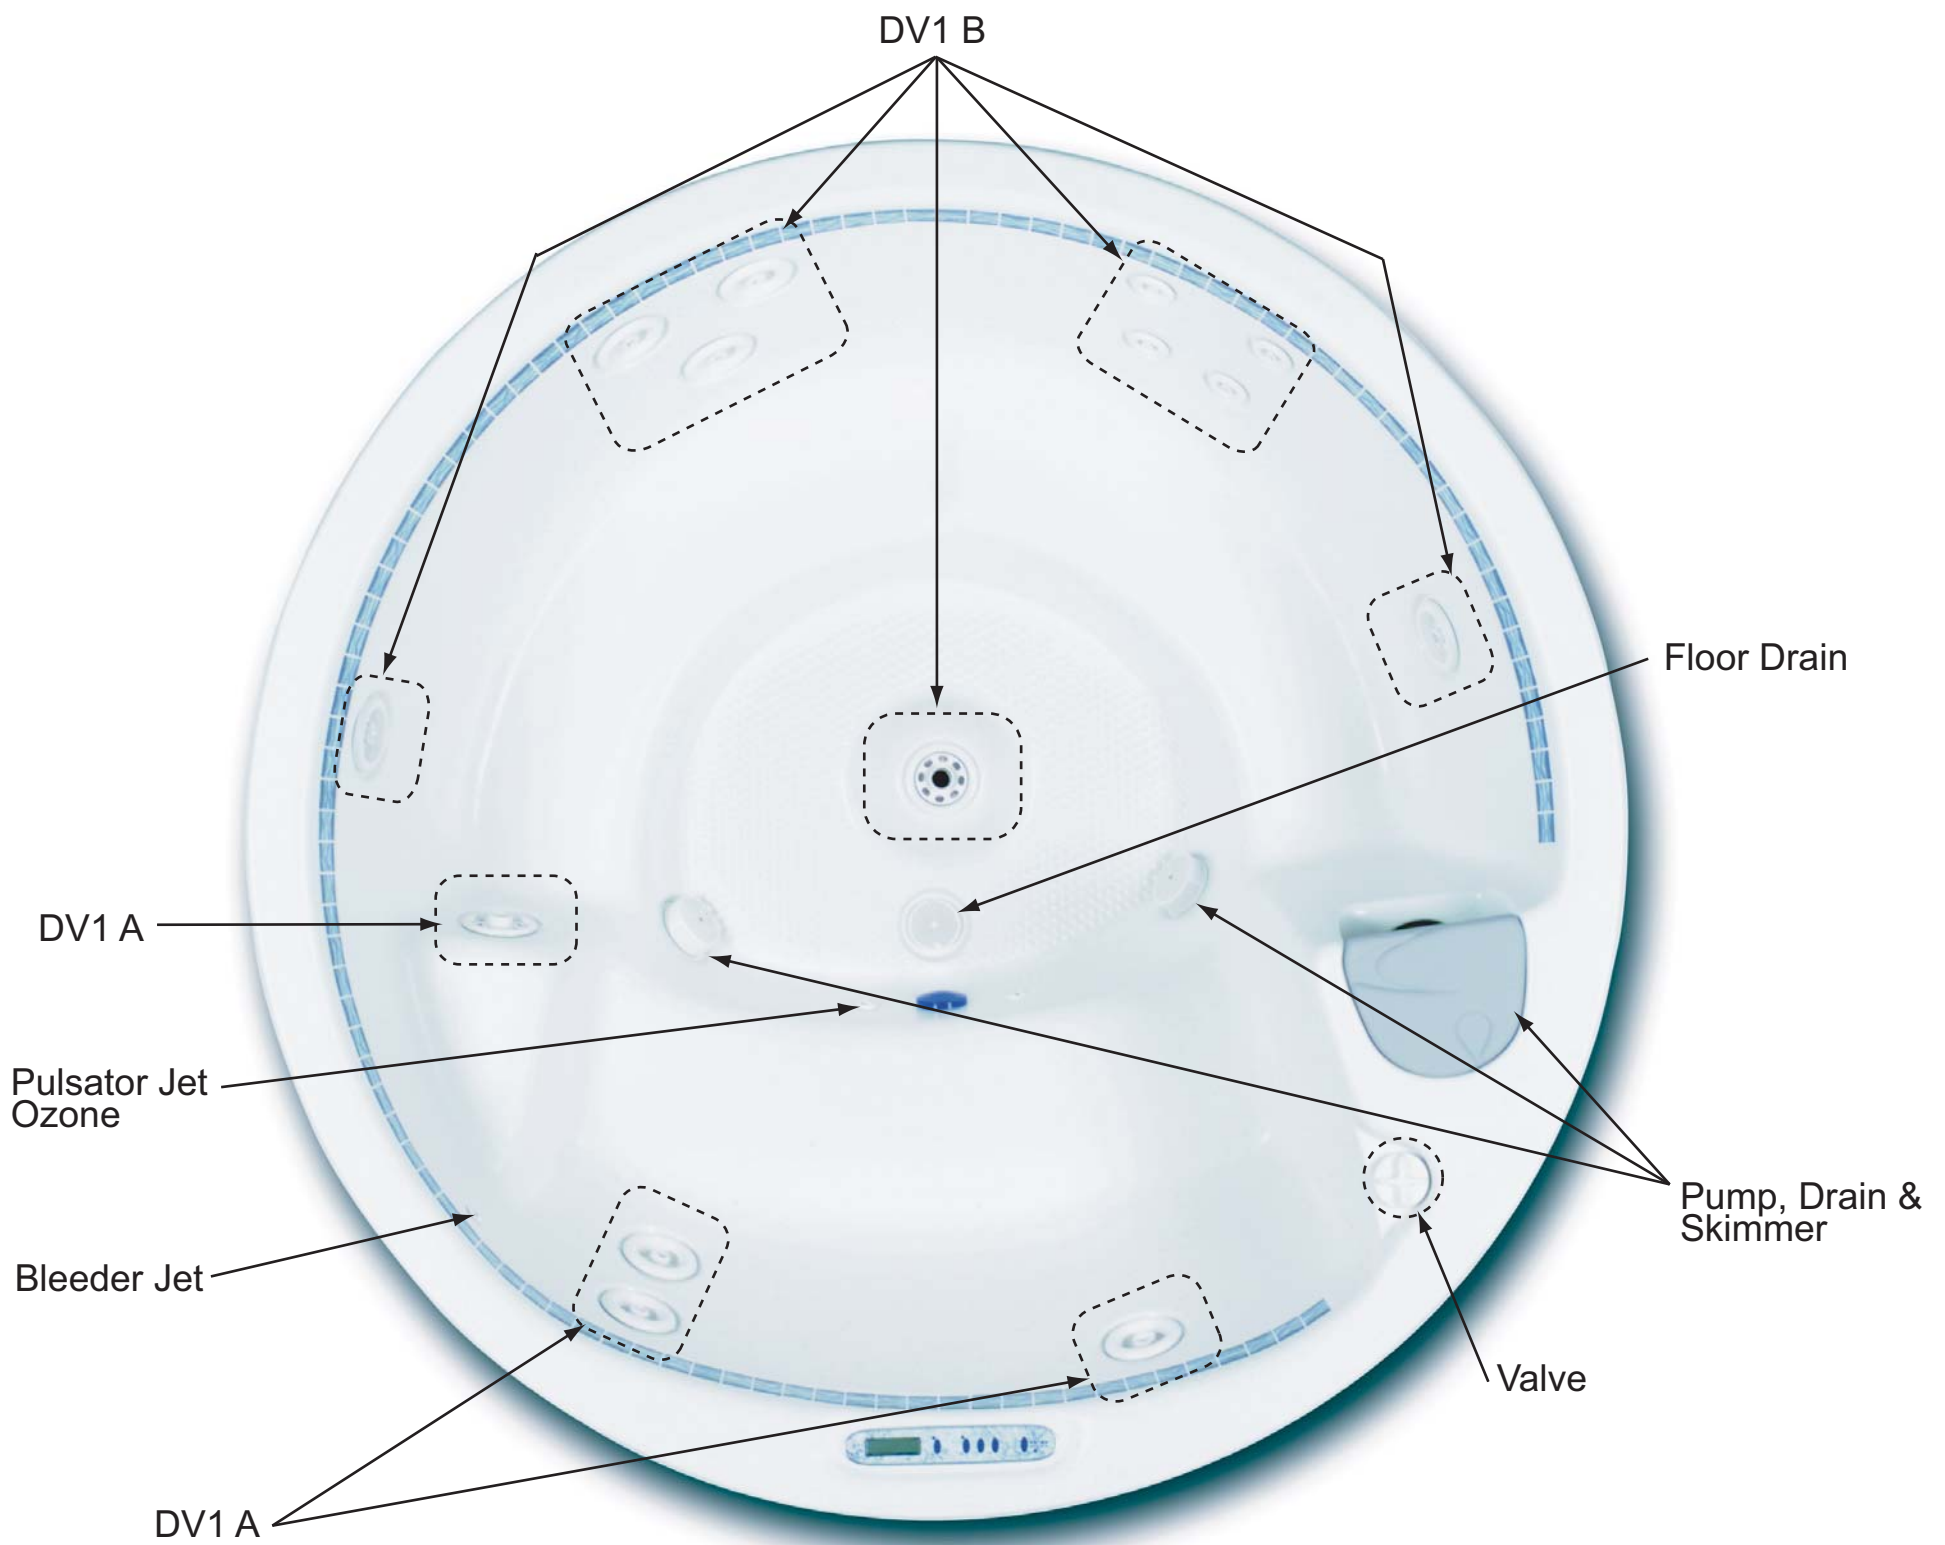

Note: 1. Subject to change without notice.

- DV1 A =Diverter Valve 1 (A position Clockwise)
- DV1 B =Diverter Valve 1 (B Position Counter Clockwise)
- DV1 C=Diverter Valve 1( Neutral Position)

# Arena Jet Insert Designations

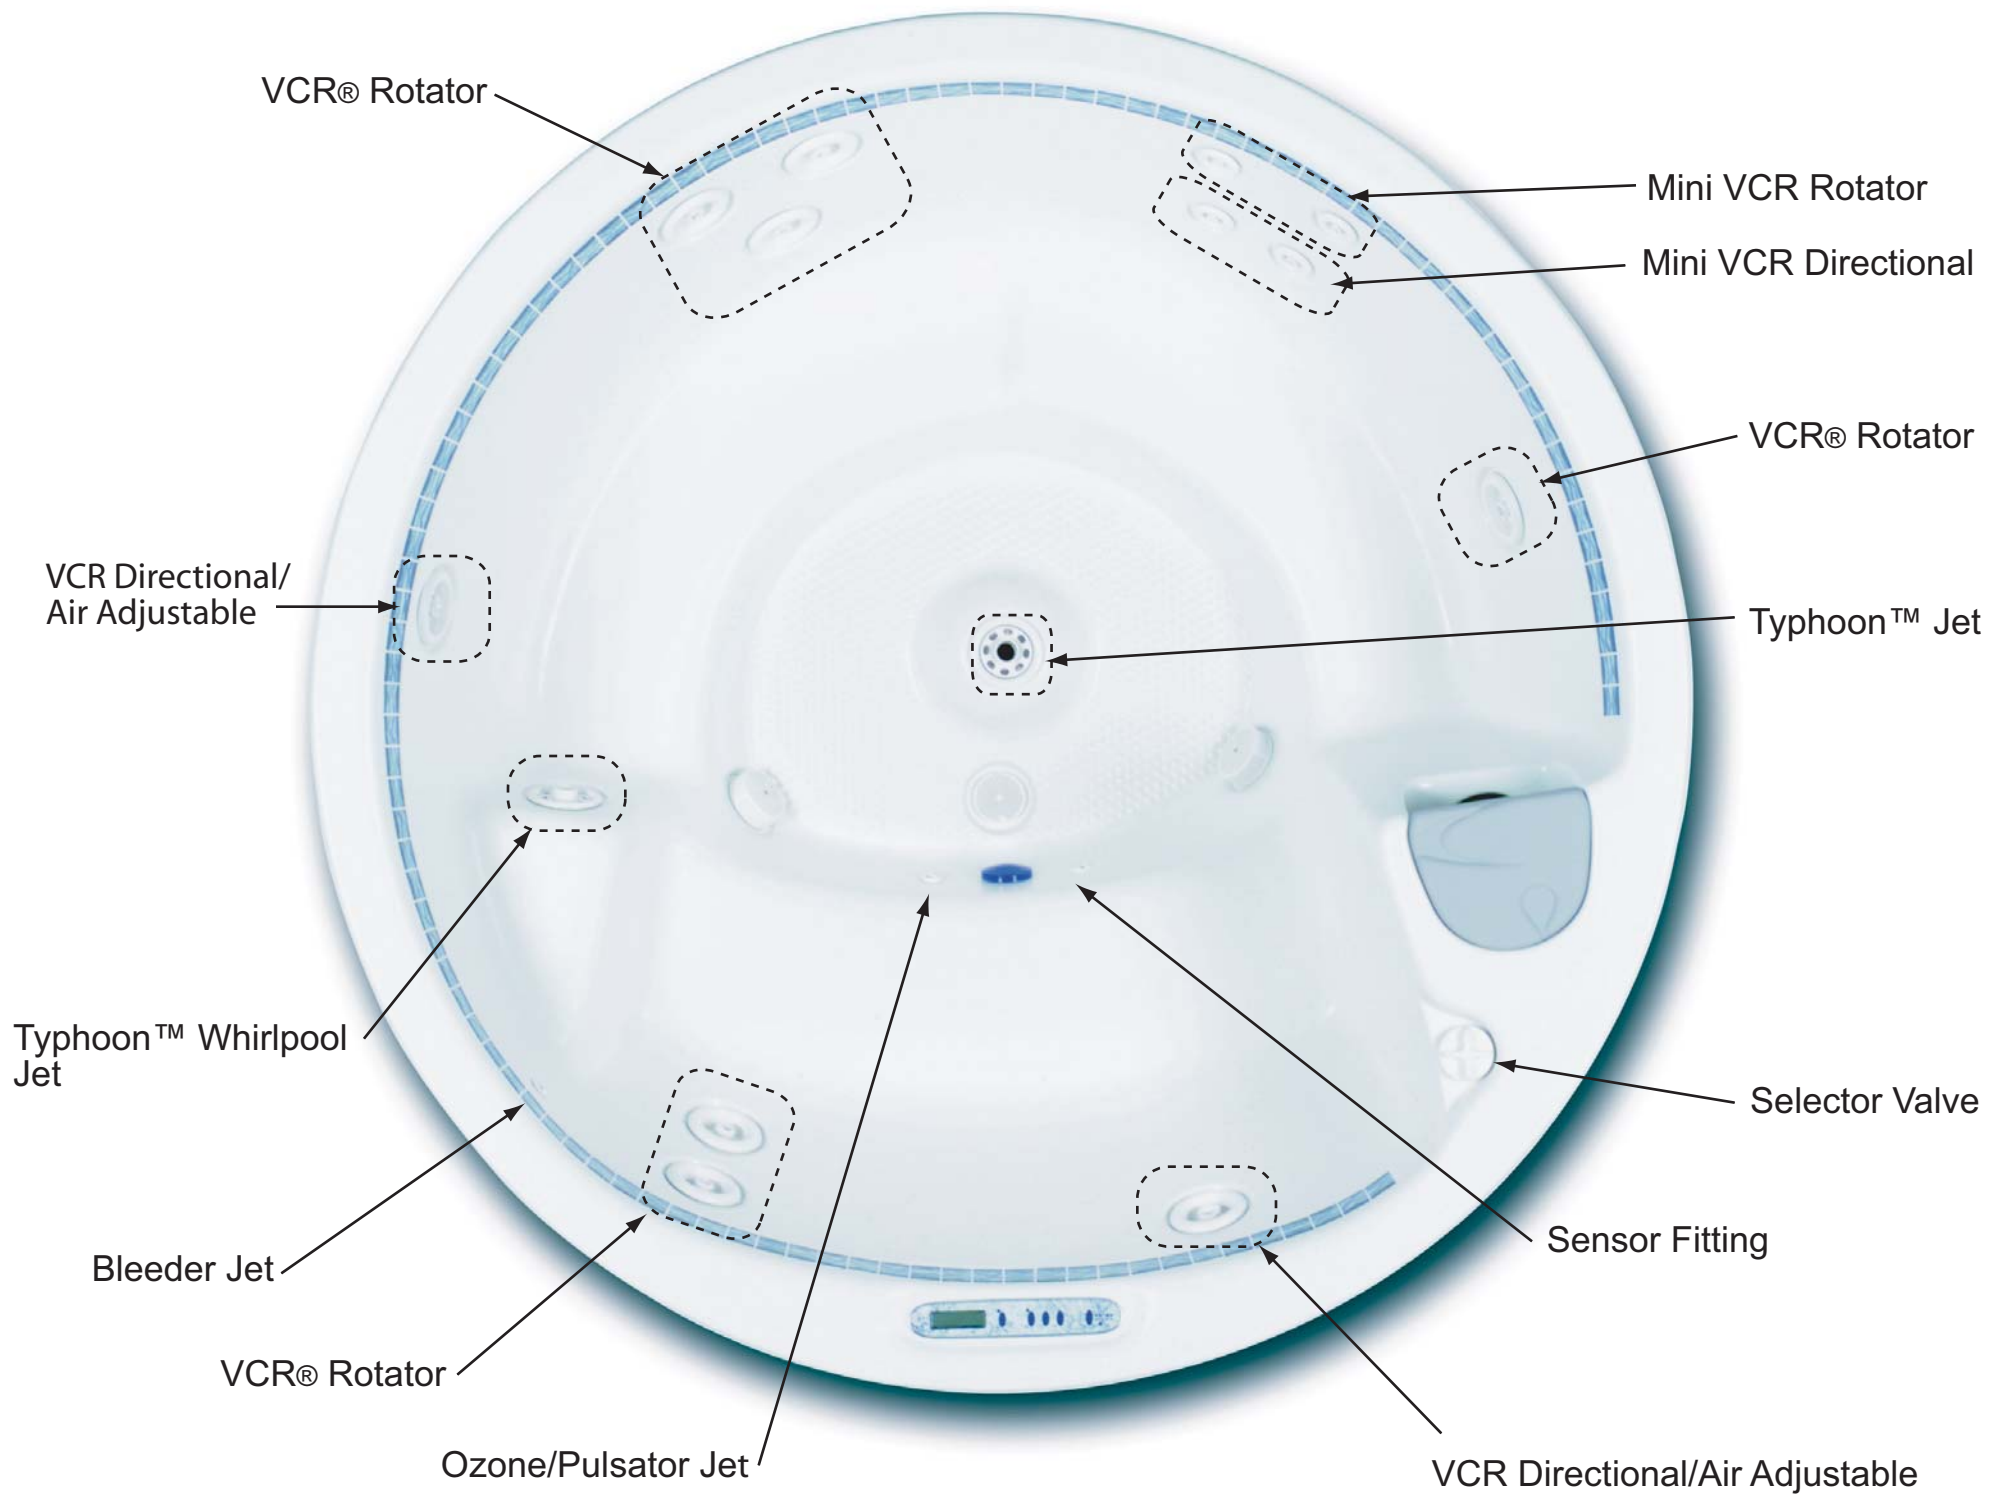

Note: 1. Subject to change without notice.